

STRONGhaul

Premium Aluminum Trailers, Built for Work or Play

Phone: (204) 364-2785

Email: sales@stronghaul.com

Address: 139144 Road 11E Arborg, MB, Canada

Box 269 R0C 0A0

Catalogue
of
Trailer Models
& Options

STRONGhaul Aluminum Trailers

UASF (82x14 Displayed)

Utility Style, Aluminum Frame, Single Axle, Flat Bed Trailer



-Standard Features and Equipment-

-6061 All Aluminum Frame	-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone
-13.5" Front Rail Height (Deck to top of Rail)	-A-Frame Mounted Jack Rated at 5K lbs
-3500lb Straight Axle, Idler	-2x10 Douglas Fir/Larch Plank Floor
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-5/16" x 30" Safety Chains, 7.6K lb Rating, with Safety Latch
-4-Pin Flat, Easy Pull Electrical Connector	-2,000lb Lashing Rings, ZP (4 rings on 8' models, 6 on 10', 8 on 12', and 10 on 14')
-2" Ball Coupler, Max rating 700lb tongue WT, with Polypropylene Tape	-Spare Tire Mount (Changes from front to side depending on tool box)
-ST205/75R15 6-ply Radial Tires	-Deck to Ground Height: 18"
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-Ground to Coupler Height: 15" When Level
-LED Lighting Package	-GVWR: 2,990lbs (3,500lbs with additional electric brake option)

-Standard Ramp Specs-

-Pocket Style Ramps, Mounts on Front of Deck, 2,500lb CAP/Ea, 78" L x 14" W-

OR

-Folding Rear Bi-Fold Ramp, Rated at 3000lbs, 54" L x 77" W (Ramp Width is trailer size -5.00" for fold down purposes)-

-Available Sizes w/ Pocket Style Ramp-

Description	STD. Payload	Dry Wt.
UASF-76x12	2,215 lbs	775
UASF-76x14	2,120 lbs	870
UASF-82x12	2,040 lbs	950
UASF-82x14	1,950 lbs	1040

-Available Sizes w/ Bi-fold Ramp-

Description	STD. Payload	Dry Wt.
UASF-76x12-B	2,225 lbs	765
UASF-76x14-B	2,100 lbs	890
UASF-82x12-B	2,035 lbs	955
UASF-82x14-B	1,950 lbs	1040

-Available Options for Both Ramp Styles-

Description	Description
Aluminum Wheel Upgrade PKG	A-Frame Mounted, Lockable Handle Tool Box
Spare Wheel, Steel	Extra Lashing Rings 2k lb
Spare Wheel, Aluminum	Jack Caster Wheel
Spray Shield, 76"	Side Mount Pivot Jack
Spray Shield, 82"	Electric Braking Axle Upgrade

UASR (76x12 Displayed)

Utility Style, **A**luminum Frame, **S**ingle Axle, **R**ailside Trailer



-Standard Features and Equipment-

-6061 All Aluminum Frame	-2x10 Douglas Fir/Larch Plank Floor
-13.5" Side Height (Deck to top of Rail)	-5/16" x 30" Safety Chains, 7.6K lb Rating, with Safety Latch
-3500lb Straight Axle, Idler	-Folding Rear Ramp rated at 3000lbs
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Ramp Unfolded Length: 54" L x 71" W (Ramp Width is trailer size - 5.00")
-4-Pin Flat, Easy Pull Electrical Connector	-Ramp Folds Down onto Deck
-2" Ball Coupler, Max rating 700lb tongue WT, with Polypropylene Tape	-2,000lb Lashing Rings , ZP (4 rings on 8' models, 6 on 10', 8 on 12', and 10 on 14')
-ST205/75R15 6-ply Radial Tires	-Spare Tire Mount (Changes from front to side depending on tool box)
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-Deck to Ground Height: 18"
-LED Lighting Package	-Ground to Coupler Height: 15" When Level
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-GVWR: 2,990lbs (3,500lbs with additional electric brake option)
-A-Frame Mounted Jack Rated at 5K lbs	

-Available Sizes-

Description	STD. Payload	Dry Wt.
UASR-60x08	2,450 lbs	540 lbs
UASR-60x10	2,380 lbs	610 lbs
UASR-60x12	2,345 lbs	645 lbs
UASR-66x08	2,380 lbs	610 lbs
UASR-66x10	2,350 lbs	640 lbs
UASR-66x12	2,265 lbs	725 lbs
UASR-76x10	2,225 lbs	765 lbs
UASR-76x12	2,200 lbs	790 lbs
UASR-76x14	2,005 lbs	985 lbs
UASR-82x12	2,140 lbs	850 lbs
UASR-82x14	2,005 lbs	985 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Spray Shield, Rail Side, 60"
Spray Shield, Rail Side, 66"
Spray Shield, Rail Side 76"
Spray Shield, Rail Side, 82"
Extra Lashing Rings 2k lb
Jack Caster Wheel
Side Mount Pivot Jack
A-Frame Mounted, Lockable Handle Tool Box
Electric Braking Axle Upgrade

UASR-DR (76x12 Displayed)

Utility Style, Aluminum Frame, Single Axle, Railside Trailer with Drop in Side Ramps



-Standard Features and Equipment-

-6061 All Aluminum Frame	-2x10 Douglas Fir/Larch Plank Floor
-13.5" Side Height (Deck to top of Rail)	-5/16" x 30" Safety Chains, 7.6K lb Rating, with Safety Latch
-3500lb Drop Axle, Idler	-Folding Rear Ramp rated at 3000lbs
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Ramp Unfolded Length: 54" L x 55" W (Ramp Width is trailer size - 5.00")
-4-Pin Flat, Easy Pull Electrical Connector	-Ramp Folds Down onto Deck
-2" Ball Coupler, Max rating 700lb tongue WT, with Polypropylene Tape	-Side Loading Access w/ Drop in Ramp Gates, 1250 lb Capacity/Ea, 61" L x 13" W
-ST205/75R15 6-ply Radial Tires	-2,000lb Lashing Rings, ZP (8 rings on 12' models, and 10 on 14')
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-Spare Tire Mount (Changes from front to side depending on tool box)
-LED Lighting Package	-Deck to Ground Height: 18"
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-Ground to Coupler Height: 15" When Level
-A-Frame Mounted Jack Rated at 5K lbs	-GVWR: 2,990lbs (3,500lbs with additional electric brake option)

-Available Sizes-

Description	STD. Payload	Dry Wt.
UASR-76x12-DR	2,100 lbs	890 lbs
UASR-76x14-DR	1,910 lbs	1080 lbs
UASR-82x12-DR	2,055 lbs	935 lbs
UASR-82x14-DR	1,975 lbs	1015 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Extra Lashing Rings 2k lb
Jack Caster Wheel
Side Mount Pivot Jack
A-Frame Mounted, Lockable Handle Tool Box
Electric Braking Axle Upgrade

UASS (60x10 Displayed)

Utility Style, Aluminum Frame, Single Axle, Solid side Trailer



-Standard Features and Equipment-

-6061 All Aluminum Frame	-2x10 Douglas Fir/Larch Plank Floor
-13.5" Side Height (Deck to top of Flange)	-5/16" x 30" Safety Chains, 7.6K lb Rating, with Safety Latch
-3500lb Straight Axle, Idler	-Folding Rear Ramp rated at 3000lbs
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Ramp Unfolded Length: 54" L x 55" W (Ramp Width is trailer size - 5.00")
-4-Pin Flat, Easy Pull Electrical Connector	-Ramp Folds Down onto Deck
-2" Ball Coupler, Max rating 700lb tongue WT, with Polypropylene Tape	-2,000lb Lashing Rings , ZP (4 rings on 8' models, 6 on 10', 8 on 12', and 10 on 14')
-ST205/75R15 6-ply Radial Tires	-Spare Tire Mount (Changes from front to side depending on tool box)
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-Deck to Ground Height: 18"
-LED Lighting Package	-Ground to Coupler Height: 15" When Level
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-GVWR: 2,990lbs (3,500lbs with additional electric brake option)
-A-Frame Mounted Jack Rated at 5K lbs	

-Available Sizes-

Description	STD. Payload	Dry Wt.
UASS-60x08	2,435 lbs	555 lbs
UASS-60x10	2,370 lbs	620 lbs
UASS-60x12	2,340 lbs	650 lbs
UASS-66x08	2,370 lbs	620 lbs
UASS-66x10	2,340 lbs	650 lbs
UASS-66x12	2,250 lbs	740 lbs
UASS-76x10	2,245 lbs	745 lbs
UASS-76x12	2,205 lbs	785 lbs
UASS-76x14	2,035 lbs	955 lbs
UASS-82x12	2,075 lbs	840 lbs
UASS-82x14	2,030 lbs	960 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Spray Shield, Solid Side, 60"
Spray Shield, Solid Side 66"
Spray Shield, Solid Side 76"
Spray Shield, Solid Side 82"
Drop In Rear Panel, 60"
Drop In Rear Panel, 66"
Drop In Rear Panel, 76"
Drop In Rear Panel, 82"
Extra Lashing Rings 2k lb
Jack Caster Wheel
Side Mount Pivot Jack
A-Frame Mounted, Lockable Handle Tool Box
Electric Braking Axle Upgrade

UASS-24 (60x10 Displayed)

Utility Style, Aluminum Frame, Single Axle, Solid side Trailer with 24" Sides



-Standard Features and Equipment-

-6061 All Aluminum Frame	-2x10 Douglas Fir/Larch Plank Floor
-22.5" Side Height (Deck to top of Flange)	-5/16" x 30" Safety Chains, 7.6K lb Rating, with Safety Latch
-3500lb Straight Axle, Idler	-Folding Rear Ramp rated at 3000lbs
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Ramp Unfolded Length: 54" L x 55" W (Ramp Width is trailer size - 5.00")
-4-Pin Flat, Easy Pull Electrical Connector	-Ramp Folds Down onto Deck
-2" Ball Coupler, Max rating 700lb tongue WT, with Polypropylene Tape	-2,000lb Lashing Rings , ZP (4 rings on 8' models, 6 on 10', 8 on 12', and 10 on 14')
-ST205/75R15 6-ply Radial Tires	-Spare Tire Mount (Changes from front to side depending on tool box)
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-Deck to Ground Height: 18"
-LED Lighting Package	-Ground to Coupler Height: 15" When Level
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-GVWR: 2,990lbs (3,500lbs with additional electric brake option)
-A-Frame Mounted Jack Rated at 5K lbs	

-Available Sizes-

Description	STD. Payload	Dry Wt.
UASS-60x10-24	2,315 lbs	675 lbs
UASS-60x12-24	2,280lbs	710 lbs
UASS-66x10-24	2,285 lbs	705 lbs
UASS-66x12-24	2,210 lbs	780 lbs
UASS-76x12-24	2,140 lbs	850 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Spray Shield, Solid Side, 60"
Spray Shield, Solid Side, 66"
Spray Shield, Solid Side, 76"
Extra Lashing Rings 2k lb
Jack Caster Wheel
Side Mount Pivot Jack
A-Frame Mounted, Lockable Handle Tool Box
Electric Braking Axle Upgrade

UASS-DR (76x12 Displayed)

Utility Style, **A**luminum Frame, **S**ingle Axle, **S**olid side Trailer with **D**rop in Side **R**amps



-Standard Features and Equipment-

-6061 All Aluminum Frame	-2x10 Douglas Fir/Larch Plank Floor
-13.5" Side Height (Deck to top of Flange)	-5/16" x 30" Safety Chains, 7.6K lb Rating, with Safety Latch
-3500lb Drop Axle, Idler	-Folding Rear Ramp rated at 3000lbs
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Ramp Unfolded Length: 54" L x 55" W (Ramp Width is trailer size - 5.00")
-4-Pin Flat, Easy Pull Electrical Connector	-Ramp Folds Down onto Deck
-2" Ball Coupler, Max rating 700lb tongue WT, with Polypropylene Tape	-Side Loading Access w/ Drop in Ramp Gates, 1250 lb Capacity/Ea, 61" L x 13" W
-ST205/75R15 6-ply Radial Tires	-2,000lb Lashing Rings, ZP (8 rings on 12' models, and 10 on 14')
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-Spare Tire Mount (Changes from front to side depending on tool box)
-LED Lighting Package	-Deck to Ground Height: 18"
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-Ground to Coupler Height: 15" When Level
-A-Frame Mounted Jack Rated at 5K lbs	-GVWR: 2,990lbs (3,500lbs with additional electric brake option)

-Available Sizes-

Description	STD. Payload	Dry Wt.
UASS-76x12-DR	2,105 lbs	885 lbs
UASS-76x14-DR	1,935 lbs	1055 lbs
UASS-82x12-DR	2,075 lbs	915 lbs
UASS-82x14-DR	1,995 lbs	995 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Extra Lashing Rings 2k lb
Jack Caster Wheel
Side Mount Pivot Jack
A-Frame Mounted, Lockable Handle Tool Box
Electric Braking Axle Upgrade

UATF (7K or 10K GVW Available)

Utility Style, Aluminum Frame, Tandem Axle, Flat Bed Trailer



-Standard Features and Equipment-

-6061 All Aluminum Frame	-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone
-13.5" Front Rail Height (Deck to top of Rail)	-A-Frame Mounted Jack Rated at 5K lbs
-3500lb Strt, Leaf Spring Axles, Elec. Brakes on -35 models	-2x8 Douglas Fir/Larch Plank Floor
-5200lb Strt, Leaf Spring Axles, Elec. Brakes on -52 models (Torsions on 20' model)	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Stake Pockets and Side Rub Rails, Removable Fenders
-7-Pin RV Style Electrical Connector	-4k lb Lashing Rings, ZP(6 rings on 12',14',16' models, 8 rings on 18',20' models)
-Junction Box, Break-away Kit with Battery and Charger	-Spare Tire Mount (Changes from front to side depending on tool box)
-2-5/16" Ball Coupler, Max 2,100lb tongue WT, with Polypropylene Tape	-Deck to Ground Height: 23"
-ST205/75R15 6-ply Radial Tires (ST225/75R15 7-ply tires for -52 models)	-Ground to Coupler Height: 16" When Level (both models)
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black (6 on 5.5" for -52)	-GVWR: 7000lbs on -35 models (9,980lbs on -52 models)
-LED Lighting Package	

-Standard Ramp Specs-

-Pocket Style Ramps, Mounts Under Rear of Deck, 2,500lb CAP/Ea, 78" L x 14" W-
-Folding Rear Bi-Fold Ramp, Rated at 3000lbs, 54" L x 77" W (Ramp Width is trailer size -5.00' for fold down purposes)-

-Available Sizes w/ Pocket Style Ramp-

Description	Payload	Dry Wt.
UATF-82x12-35	5,905 lbs	1095 lbs
UATF-82x14-35	5,830 lbs	1170 lbs
UATF-82x16-35	5,715 lbs	1285 lbs
UATF-82x18-35	5,620 lbs	1380 lbs
UATF-82x12-52	8,665 lbs	1225 lbs
UATF-82x14-52	8,595 lbs	1295 lbs
UATF-82x16-52	8,470 lbs	1420 lbs
UATF-82x18-52	8,390 lbs	1500 lbs

-Available Sizes w/ Bi-fold Ramp-

Description	Payload	Dry Wt.
UATF-82x12-35-B	5,905 lbs	1095 lbs
UATF-82x14-35-B	5,840 lbs	1160 lbs
UATF-82x16-35-B	5,730 lbs	1270 lbs
UATF-82x18-35-B	5,625 lbs	1375 lbs
UATF-82x12-52-B	8,660 lbs	1230 lbs
UATF-82x14-52-B	8,590 lbs	1300 lbs
UATF-82x16-52-B	8,470 lbs	1420 lbs
UATF-82x18-52-B	8,380 lbs	1510 lbs

-Available Options for Both Ramp Styles-

Description	Description
Aluminum Wheel Upgrade PKG	Jack Caster Wheel
Spare Wheel, Steel	Side Mount Pivot Jack
Spare Wheel, Aluminum	Stabilizer Stands, Drop Leg
Spray Shield, 82"	2-5/16" Adjustable Coupler
Extra Lashing Rings 4k lb	12" x 18" Winch Plate
Recessed Lashing Rings 6k lb	Rail Cover (Stone Shield 15")
	A-Frame Mounted, Lockable Handle Tool Box

UATF-DT (7K or 10K GVW Available)

Utility Style, Aluminum Frame, Tandem Axle, Flat Bed Trailer with 2' Dove Tail



-Standard Features and Equipment-

-6061 All Aluminum Frame	-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone
-2' Dovetail Section, 3" Drop (Length of trailer includes DT section)	-A-Frame Mounted Jack Rated at 5K lbs
-13.5" Front Rail Height (Deck to top of Rail)	-2x8 Douglas Fir/Larch Plank Floor
-3500lb Strt, Leaf Spring Axles, Elec. Brakes on -35 models	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-5200lb Strt, Leaf Spring Axles, Elec. Brakes on -52 models (Torsions on 22' model)	-Stake Pockets and Side Rub Rails, Removable Fenders
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-4k lb Lashing Rings, ZP(6 rings on 16' models, 8 rings on 18',20',22' models)
-7-Pin RV Style Electrical Connector	-Spare Tire Mount (Changes from front to side depending on tool box)
-Junction Box, Break-away Kit with Battery and Charger	-Deck to Ground Height: 23" (both 3500lb and 5200lb models)
-2-5/16" Ball Coupler, Max 2,100lb tongue WT, with Polypropylene Tape	-Bumper to Ground Height: 20" (both 3500lb and 5200lb models)
-ST205/75R15 6-ply Radial Tires (ST225/75R15 7-ply tires for -DT52 models)	-Ground to Coupler Height: 16" When Level (both 3500lb and 5200lb models)
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black (6 on 5.5" for -DT52)	-GVWR: 7000lbs on -DT35 models (9,980lbs on -DT52 models)
-LED Lighting Package	

-Standard Ramp Specs-

-Pocket Style Ramps, Mounts Under Rear of Deck, 2,500lb CAP/Ea, 78" L x 14" W-
-Folding Rear Bi-Fold Ramp, Rated at 3000lbs, 54" L x 77" W (Ramp Width is trailer size -5.00" for fold down purposes)-

-Available Sizes w/ Pocket Style Ramp-

Description	Payload	Dry Wt.
UATF-82x16-DT35	5,700 lbs	1300 lbs
UATF-82x18-DT35	5,595 lbs	1405 lbs
UATF-82x20-DT35	5,485 lbs	1515 lbs
UATF-82x16-DT52	8,440 lbs	1450 lbs
UATF-82x18-DT52	8,345 lbs	1545 lbs
UATF-82x20-DT52	8,255 lbs	1635 lbs

-Available Sizes w/ Bi-fold Ramp-

Description	Payload	Dry Wt.
UATF-82x16-DT35-B	5,705 lbs	1295 lbs
UATF-82x18-DT35-B	5,605 lbs	1395 lbs
UATF-82x20-DT35-B	5,480 lbs	1520 lbs
UATF-82x16-DT52-B	8,440 lbs	1450 lbs
UATF-82x18-DT52-B	8,330 lbs	1560 lbs
UATF-82x20-DT52-B	8,220 lbs	1670 lbs

-Available Options for Both Ramp Styles-

Description	Description
Aluminum Wheel Upgrade PKG	Jack Caster Wheel
Spare Wheel, Steel	Side Mount Pivot Jack
Spare Wheel, Aluminum	Stabilizer Stands, Drop Leg
Spray Shield, 82"	2-5/16" Adjustable Coupler
Extra Lashing Rings 4k lb	12" x 18" Winch Plate
Recessed Lashing Rings 6k lb	Rail Cover (Stone Shield 15")
	Lockable Handle Tool Box

UATR (76x12 Displayed)

Utility Style, **A**luminum Frame, **T**andem Axle, **R**ailside Trailer



-Standard Features and Equipment-

-6061 All Aluminum Frame	-A-Frame Mounted Jack Rated at 5K lbs
-13.5" Side Height (Deck to top of Rail)	-2x10 Douglas Fir/Larch Plank Floor
-Tandem 3500lb Drop Axles, Electric Brakes	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Folding Rear Ramp rated at 3000lbs
-7-Pin RV Style Electrical Connector	-Ramp Unfolded Length: 54" L x 71" W (Ramp Width is trailer size - 5.00")
-Junction Box, Break-away Kit with Battery and Charger	-Ramp Folds Down onto Deck
-2-5/16" Ball Coupler, Max 2,100lb tongue WT, with Polypropylene Tape	-4,000lb Lashing Rings, ZP (6 rings on 12' models, 6 on 14', 6 on 16', and 8 on 18')
-ST205/75R15 6-ply Radial Tires	-Spare Tire Mount (Changes from front to side depending on tool box)
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-Deck to Ground Height: 18"
-LED Lighting Package	-Ground to Coupler Height: 15" When Level
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-GVWR: 7000lbs

-Available Sizes-

Description	Payload	Dry Wt.
UATR-76x12	5,900 lbs	1100 lbs
UATR-76x14	5,845 lbs	1155 lbs
UATR-76x16	5,735 lbs	1265 lbs
UATR-82x12	5,875 lbs	1125 lbs
UATR-82x14	5,820 lbs	1180 lbs
UATR-82x16	5,705 lbs	1295 lbs
UATR-82x18	5,610 lbs	1460 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Spray Shield, RS 76"
Spray Shield, RS, 82"
Extra Lashing Rings 4k lb
Recessed Lashing Rings 6k lb
Jack Caster Wheel
Side Mount Pivot Jack
Stabilizer Stands, Drop Leg
2-5/16" Adjustable Coupler
12" x 18" Winch Plate
A-Frame Mounted, Lockable Handle Tool Box

UATR-DR (82x16 Displayed)

Utility Style, **A**luminum Frame, **T**andem Axle, **R**ailside Trailer with **D**rop in Side **R**amps



-Standard Features and Equipment-

-6061 All Aluminum Frame	-2x10 Douglas Fir/Larch Plank Floor
-13.5" Side Height (Deck to top of Rail)	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-Tandem 3500lb Drop Axles, Electric Brakes	-Folding Rear Ramp rated at 3000lbs
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Ramp Unfolded Length: 54" L x 71" W (Ramp Width is trailer size - 5.00")
-7-Pin RV Style Electrical Connector	-Ramp Folds Down onto Deck
-Junction Box, Break-away Kit with Battery and Charger	-Side Loading Access w/ Drop in Ramp Gates, 1250lb Capacity/Ea, 61" L x 13" W
-2-5/16" Ball Coupler, Max 2,100lb tongue WT, with Polypropylene Tape	-4,000lb Lashing Rings, ZP (6 rings on 14' models, 6 on 16', and 8 on 18')
-ST205/75R15 6-ply Radial Tires	-Spare Tire Mount (Changes from front to side depending on tool box)
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-Deck to Ground Height: 18"
-LED Lighting Package	-Ground to Coupler Height: 15" When Level
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-GVWR: 7000lbs
-A-Frame Mounted Jack Rated at 5K lbs	

-Available Sizes-

Description	Payload	Dry Wt.
UATR-76x14-DR	5,820 lbs	1180 lbs
UATR-76x16-DR	5,715 lbs	1285 lbs
UATR-82x14-DR	5,780 lbs	1220 lbs
UATR-82x16-DR	5,700 lbs	1300 lbs
UATR-82x18-DR	5,540 lbs	1460 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Extra Lashing Rings 4k lb
Recessed Lashing Rings 6k lb
Jack Caster Wheel
Side Mount Pivot Jack
Stabilizer Stands, Drop Leg
2-5/16" Adjustable Coupler
12" x 18" Winch Plate
A-Frame Mounted, Lockable Handle Tool Box

UATS-24 (76x12 Displayed)

Utility Style, Aluminum Frame, Tandem Axle, Solid side Trailer with 24" Sides



-Standard Features and Equipment-

-6061 All Aluminum Frame	-A-Frame Mounted Jack Rated at 5K lbs
-22.5" Side Height (Deck to top of Flange)	-2x10 Douglas Fir/Larch Plank Floor
-Tandem 3500lb Drop Axles, Electric Brakes	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Folding Rear Ramp rated at 3000lbs
-7-Pin RV Style Electrical Connector	-Ramp Unfolded Length: 54" L x 71" W (Ramp Width is trailer size - 5.00")
-Junction Box, Break-away Kit with Battery and Charger	-Ramp Folds Down onto Deck
-2-5/16" Ball Coupler, Max 2,100lb tongue WT, with Polypropylene Tape	-4,000lb Lashing Rings, ZP (6 rings on 12' models, 6 on 14', 6 on 16', and 8 on 18')
-ST205/75R15 6-ply Radial Tires	-Spare Tire Mount (Changes from front to side depending on tool box)
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-Deck to Ground Height: 18"
-LED Lighting Package	-Ground to Coupler Height: 15" When Level
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-GVWR: 7000lbs

-Available Sizes-

Description	Payload	Dry Wt.
UATS-76x12-24	5,775 lbs	1225 lbs
UATS-76x14-24	5,730 lbs	1270 lbs
UATS-76x16-24	5,655 lbs	1345 lbs
UATS-82x14-24	5,715 lbs	1285 lbs
UATS-82x16-24	5,630 lbs	1370 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Spray Shield, Solid Side, 76"
Spray Shield, Solid Side, 82"
Extra Lashing Rings 4k lb
Recessed Lashing Rings 6k lb
Jack Caster Wheel
Side Mount Pivot Jack
Stabilizer Stands, Drop Leg
2-5/16" Adjustable Coupler
A-Frame Mounted, Lockable Handle Tool Box

UATS (76x14 Displayed)

Utility Style, Aluminum Frame, Tandem Axle, Solid side Trailer



-Standard Features and Equipment-

-6061 All Aluminum Frame	-A-Frame Mounted Jack Rated at 5K lbs
-13.5" Side Height (Deck to top of Flange)	-2x10 Douglas Fir/Larch Plank Floor
-Tandem 3500lb Drop Axles, Electric Brakes	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Folding Rear Ramp rated at 3000lbs
-7-Pin RV Style Electrical Connector	-Ramp Unfolded Length: 54" L x 71" W (Ramp Width is trailer size - 5.00")
-Junction Box, Break-away Kit with Battery and Charger	-Ramp Folds Down onto Deck
-2-5/16" Ball Coupler, Max 2,100lb tongue WT, with Polypropylene Tape	-4,000lb Lashing Rings , ZP(6 rings on 12' models, 6 on 14', 6 on 16', and 8 on 18')
-ST205/75R15 6-ply Radial Tires	-Spare Tire Mount (Changes from front to side depending on tool box)
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-Deck to Ground Height: 18"
-LED Lighting Package	-Ground to Coupler Height: 15" When Level
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-GVWR: 7000lbs

-Available Sizes-

Description	Payload	Dry Wt.
UATS-76x12	5,920 lbs	1080 lbs
UATS-76x14	5,860 lbs	1140 lbs
UATS-76x16	5,740 lbs	1260 lbs
UATS-82x12	5,880 lbs	1120 lbs
UATS-82x14	5,805 lbs	1195 lbs
UATS-82x16	5,720 lbs	1280 lbs
UATS-82x18	5,635 lbs	1365 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Drop In Rear Panel, 76"
Drop In Rear Panel, 82"
Spray Shield, SS 76"
Spray Shield, SS, 82"
Extra Lashing Rings 4k lb
Recessed Lashing Rings 6k lb
Jack Caster Wheel
Side Mount Pivot Jack
Stabilizer Stands, Drop Leg
2-5/16" Adjustable Coupler
A-Frame Mounted, Lockable Handle Tool Box

UATS-DR (82x18 Displayed)

Utility Style, Aluminum Frame, Tandem Axle, Solid side Trailer with Drop in Side Ramps



-Standard Features and Equipment-

-6061 All Aluminum Frame	-2x10 Douglas Fir/Larch Plank Floor
-13.5" Side Height (Deck to top of Flange)	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-Tandem 3500lb Drop Axles, Electric Brakes	-Folding Rear Ramp rated at 3000lbs
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Ramp Unfolded Length: 54" L x 77" W (Ramp Width is trailer size - 5.00")
-7-Pin RV Style Electrical Connector	-Ramp Folds Down onto Deck
-Junction Box, Break-away Kit with Battery and Charger	-Side Loading Access w/ Drop in Ramp Gates, 1250lb Capacity/Ea, 61" L x 13" W
-2-5/16" Ball Coupler, Max 2,100lb tongue WT, with Polypropylene Tape	-4,000lb Lashing Rings , ZP (6 rings on 14' models, 6 on 16', and 8 on 18')
-ST205/75R15 6-ply Radial Tires	-Spare Tire Mount (Changes from front to side depending on tool box)
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-Deck to Ground Height: 18"
-LED Lighting Package	-Ground to Coupler Height: 15" When Level
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-GVWR: 7000lbs
-A-Frame Mounted Jack Rated at 5K lbs	

-Available Sizes-

Description	Payload	Dry Wt.
UATS-76x14-DR	5,830 lbs	1170 lbs
UATS-76x16-DR	5,710 lbs	1290 lbs
UATS-82x14-DR	5,750 lbs	1250 lbs
UATS-82x16-DR	5,685 lbs	1315 lbs
UATS-82x18-DR	5,550 lbs	1450 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Extra Lashing Rings 4k lb
Recessed Lashing Rings 6k lb
Jack Caster Wheel
Side Mount Pivot Jack
Stabilizer Stands, Drop Leg
2-5/16" Adjustable Coupler
A-Frame Mounted, Lockable Handle Tool Box

UATT (10K GVW)

Utility Style, Aluminum Frame, Tandem Axle, Tilt Deck Car Hauler



-Standard Features and Equipment-

-83" Between Fenders, 80" Narrowest Point of Tilt Deck, 18' Deck Area with 3' Knife Edge, 21' Overall Deck Length	-LED Lighting Package
-6061 All Aluminum Frame	-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone
-Gravity Tilting, With Hydraulic Damper and Locking Valve	-A-Frame Mounted Jack Rated at 5K lbs
-Tilt Loading Angle 9 Degrees	-2x8 Douglas Fir/Larch Plank Floor
13.5" Front Rail Height (Deck to top of Rail)	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-5200lb Dexter Torsion Drop Axles, with Electrical Self Adjusting Brakes	-Stake Pockets and Side Rub Rails
-7-Pin RV Style Arctic Rated Electrical Connector	-8x 4,000lb Lashing Ring, Zinc Plated
-Junction Box, Break-away Kit with Battery and Charger	-Spare Tire Mount (Changes from front to side depending on tool box)
-2-5/16" Ball Coupler, Max rating 2,100lb tongue WT, with Polypropylene Tape	-Deck to Ground Height: 20"
-ST225/75R15 7-ply Radial Tires	-Ground to Coupler Height: 17" When Level
-Modular-Style Steel Wheels, R15", 6 lug on 5.5" BHP, Black	-GVWR: 9,980lbs
	-Ship Weight: 2500lbs

-Available Sizes-


Description	Payload	Dry Wt.
UATT-80x21	7,615 lbs	2275 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Spray Shield, 82"
Extra Lashing Rings 4k lb
Recessed Lashing Rings 6k lb
Jack Caster Wheel
Side Mount Pivot Jack
2-5/16" Adjustable Coupler
Under Deck Winch Mount
Rail Cover (Stone Shield 15")
Lockable Handle Tool Box

WATF (10K GVW)

Water Hauler, **A**luminum Frame, **T**andem Axle, **F**lat Bed Trailer

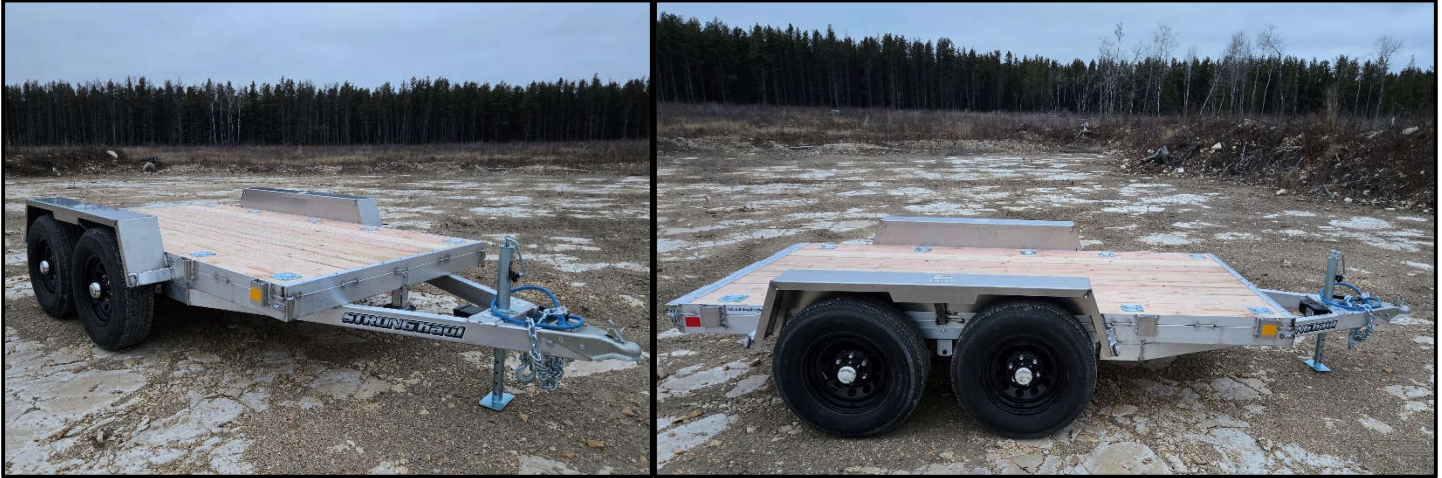

-Standard Features and Equipment-

-4.00" x 2.00" x .250w 6061-T6 Aluminum Frame Tubes and Hitch Tubes	-A-Frame Mounted Jack Rated at 5K lbs
-3.00" x 1.50" x .188w 6061-T6 Aluminum Cross member Channels on 16" ctrs	-2x10 Douglas Fir/Larch Plank Floor
-5200lb Strt, Leaf Spring Axles, Elec. Brakes	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-6 x Stake Pockets for Additional Hook Points
-7-Pin RV Style Electrical Connector	-6k lb Recessed Lashing Rings, ZP (10 lashing rings on 10' model)
-Junction Box, Break-away Kit with Battery and Charger	-Underside Spare Tire Mount, in A-Frame of hitch (Changes to stake pocket mount depending on tool box)
-2-5/16" Ball Coupler, Max 2,100lb tongue WT, with Polypropylene Tape	-Deck to Ground Height: 23"
-ST225/75R15 7-ply Radial Tires	-Ground to Coupler Height: 16" When Level (both models)
-Modular-Style Steel Wheels, R15", 6 lug on 5.5" BHP, Black	-GVWR: 9,980lbs (Designed to carry 1000gallon water tank)
-LED Lighting Package	
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	

-Available Sizes-

Description	Payload	Dry Wt.
WATF-66x10-52	9,065 lbs	900 lbs
WATF-66x12-52	8,840 lbs	1050 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Recessed Lashing Rings 6k lb
Jack Caster Wheel
Side Mount Pivot Jack
Lockable Handle Tool Box
2-5/16" Adjustable Coupler

EATF-DT (10K or 14K GVW Available)

Equipment Hauler, Aluminum Frame, Tandem Axle, Flat Bed Trailer with 2' Dove Tail



-Standard Features and Equipment-

Frame Tubes: 8.00" x 3.00" x .250"w 6061-T6	Wheels: Black Modular-Style Wheels, R15" x 6" W, 6 Lug on 5.5" BHP - DT52
Hitch Tubes: 6.00" x 2.00" x .250"w 6061-T6	Wheels: Black Modular Style Wheels, R16" x 8" W, 8 Lug on 6.5" BHP - DT70
Floor Channels: 3.00" x 1.50" x .190"w 6061-T6 on 16" centers	Harness Plug: 7-Way RV-Style Connector with Break-away Kit
Stake Pockets: .250" (3.5"x1.5" ID)	Lighting: LED Lighting Pkg with Sealed Harness
Rub Rail: .250" x 3.00" 6061-T6	Decking: 2x8 No.1 Grade, Douglas Fir/Larch Plank Floor
Dovetail Section: 2' with 3" Drop (Length of trailer includes DT section)	Safety Chains: 3/8" x 35" Chains, 16.2K lb. Rating, with Safety Latch
Axles: 5200lb Straight, E-brake, Slipper Leaf Spring, Dexter Axles - DT52	Fenders: Tip Out Fenders with Rubber Latch
Axles: 7000lb Straight, E-brake, Slipper Leaf Spring, Dexter Axles - DT70	Stabilizer Stands: Fold Up Stabilizer Stands – Pocket Ramp Model Only
Suspension: HD Slipper Style, Greaseable Equalizer	Lashing Rings: -4k lb, Zinc Plated (8 Rings on 20' model, 10 on 22'/24', 12 on 26')
Axle Mounting Brackets: .250" Hangers & Main Brkt, Galv. with Poly Tape	Deck to Ground Height: 26"
Coupler: 2-5/16" Adjustable Ball Coupler, 4" of Height Adjustment	Bumper to Ground Height: 23"
Jack: 9,500lb, Drop Leg Jack with Removable Side Wind Handle	Coupler to Ground Height: 16" When Level (18" or 14" with adjustment)
Spare Tire Mount: 13.5" Front Rail with Mount (side MNT with toolbox opt)	Ramp Loading Angle: 15 Degrees
Tires: Goodride or Westlake ST225/75R15 6-ply Radial Tires on - DT52	Ramp Option 1: Pocket Style, 7,000lb CAP/Ea, 78" L x 14" W
Tires: Goodride or Westlake ST235/80R16 10-ply Radial Tires - DT70	Ramp Option 2: Dual Beaver Tail Ramps, 8,000lb CAP/Ea, 60" L x 32" W

-Available Sizes w/ Pocket Style Ramp-

Description	Payload	Dry Wt.
EATF-82x20-DT52	8,170 lbs	1720 lbs
EATF-82x22-DT52	8,070 lbs	1820 lbs
EATF-82x24-DT52	7,970 lbs	1920 lbs
EATF-82x26-DT52	7,870 lbs	2020 lbs
EATF-82x20-DT70	12,080 lbs	1920 lbs
EATF-82x22-DT70	11,980 lbs	2020 lbs
EATF-82x24-DT70	11,880 lbs	2120 lbs
EATF-82x26-DT70	11,780 lbs	2220 lbs

-Available Sizes w/ Beaver Tail Ramp-

Description	Payload	Dry Wt.
EATF-82x20-DT52-B	8,170 lbs	1720 lbs
EATF-82x22-DT52-B	8,070 lbs	1820 lbs
EATF-82x24-DT52-B	7,970 lbs	1920 lbs
EATF-82x26-DT52-B	7,870 lbs	2020 lbs
EATF-82x20-DT70-B	12,080 lbs	1920 lbs
EATF-82x22-DT70-B	11,980 lbs	2020 lbs
EATF-82x24-DT70-B	11,880 lbs	2120 lbs
EATF-82x26-DT70-B	11,780 lbs	2220 lbs

-Available Options for Both Ramp Styles-

Description	Description
Aluminum Wheel Upgrade PKG	Toolbox, A-Frame Mounted with Lockable Handle
Spare Wheel, Aluminum	Extra Lashing Rings 4k lb
Spare Wheel, Steel Black	Recessed Lashing Rings 6k lb
Stone Shield (Covers Front Rail)	Winch Plate 12" x 18"
Spray Shield (27" Height from Deck)	

EATD (10K or 14K GVW)

Equipment Hauler, Aluminum Frame, Tandem, Deck Over Axle Trailer



-Standard Features and Equipment-

Deck Size: 102" W x 288" L (Ramps fold flat to increase deck length to 348")	Wheels: Black Modular Style Wheels, R16" x 8" W, 8 Lug on 6.5" BHP
Overall Size: 102" W x 425" L	Tires: Goodride or Westlake ST235/80R16 10-ply Radial Tires
GVWR: 14,000lbs (can be derated to 10,000lbs at time of registration)	Harness Plug: 7-Way RV-Style Connector with Break-away Kit
Stake Pockets: .250" Thick, Inner Measurements: 3.5"x1.5"	Lighting: LED Lighting Pkg with Sealed Harness
Rub Rail: .250" x 3.00" 6061-T6	Decking: 2x8 No.1 Grade, Douglas Fir/Larch Plank Floor
Winch track: Double L Winch Track	Safety Chains: 3/8" x 35" Chains, 16.2K lb. Rating, with Safety Latch
Hitch Length: 63" L	Spare Mount: A-Frame Spare Tire Mount
Front Guard: 8" Front Lip/ Stone Guard	Deck to GND Height: 35"
Suspension: 3,500lb HD Slipper Style Leaf Springs, Greaseable Equalizer	Top of Bumper to GND Height: 20"
Axles: 7000lb Straight, E-brake, Slipper Leaf Spring, Dexter Axles	Coupler to GND Height: 19" when Level
Axle Mounting Brackets: .250" Hangers & Main Brkt, Galv. with Poly Tape	Coupler: 2-5/16" Adjustable Ball Coupler, 8" of Adjustment with Poly Tape
Chain Tubes: 2.00" x .250" 6061-T6 Round Tubes	Beavertail: 5' Beavertail Section, 16" Drop (Trailer Length includes Beavertail)
Jack: 9,500lb, Drop Leg Jack with Removable Side Wind Handle	Deck Hatch: Rear Central Hatch, Lifts Between Ramps to be Level with Deck Surface
Frame Tubes: 8.00" x 3.00" x .250"w 6061-T6	Ramp Loading Angle: 15 Degrees
Hitch Tubes: 8.00" x 3.00" x .250"w 6061-T6	Ramps: Dual Flip Over Beaver Tail Ramps, 8,000lb CAP/Ea, 60" L x 32" W
Outer Frame Tubes: 5.00" x 2.00" x .190"w 6061-T6	Integrated Ramp Knee Brace, Spring Assisted
Crossmembers: 3.00" x 1.50" x .190"w 6061-T6 on 16" CTR's	

-Available Sizes-


Description	Payload	Dry Wt.
EATD-101x23-14K	10,635 lbs	3,365 lbs
EATD-101x25-14K	10,535 lbs	3,465 lbs
EATD-101x27-14K	10,435 lbs	3,565 lbs
EATD-101x29-14K	10,335 lbs	3,665 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Aluminum
Spare Wheel, Steel Black Modular Style
Extra Lashing Rings, 4k lb
Recessed Lashing Rings, 6k lb
Winch Plate, 12" x 18"
Toolbox, A-Frame Mounted with Lockable Handle

FATD (7K or 10K GVW)

Flat deck Style, **A**luminum Frame, **T**andem, **D**eck over Axle Trailer

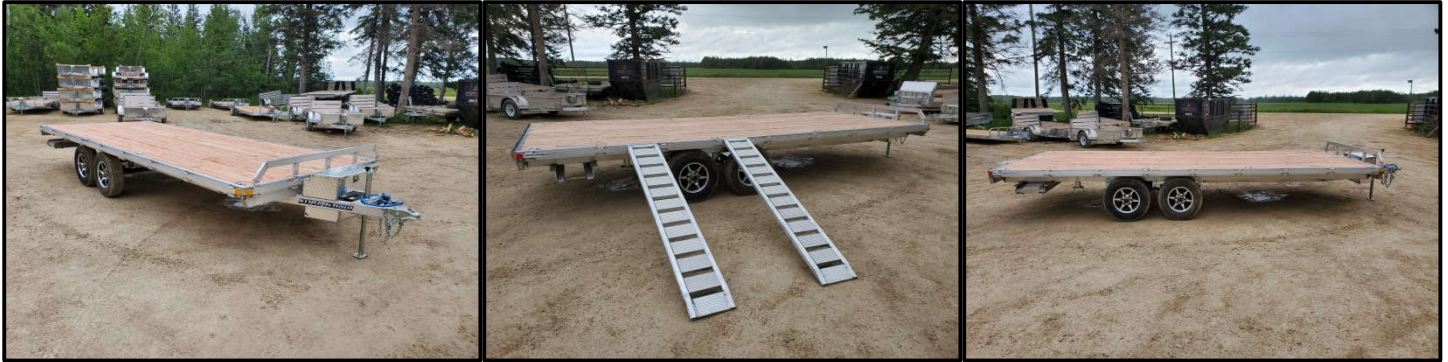

-Standard Features and Equipment-

-6061 All Aluminum Frame	-2x8 Douglas Fir/Larch Plank Floor
-3500lb Straight Axles, Elec. Brakes (Changes to 5200lb axles on -52 models)	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Folding Rear Ramp rated at 3000lbs
-7-Pin RV Style Electrical Connector	-Pocket Style Ramps, Mounts under Rear of Deck, 2,500lb CAP/Ea 78" L x 14" W
-Junction Box, Break-away Kit with Battery and Charger	-Stake Pockets and Side Rub Rail All Around
-2-5/16" Ball Coupler, Max rating 2,100lb tongue WT, with Polypropylene Tape	-4,000lb Lashing Rings , ZP (6 rings on 14' models, 6 on 16', and 8 on 18')
-ST205/75R15 6-ply Radial Tires (ST225/75R15 7-ply tires for -52 models)	-Spare Tire Mount (Changes from front to side depending on tool box)
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black (6 on 5.5" for -52)	-Deck to Ground Height: 30"
-LED Lighting Package	-Ground to Coupler Height: 17" When Level
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-GVWR: 7000lbs on -35 models (9,980lbs on -52 models)
-A-Frame Mounted Jack Rated at 5K lbs	

-Available Sizes -35 Models-

Description	Payload	Dry Wt.
FATD-101x14-35	5,470 lbs	1530 lbs
FATD-101x16-35	5,400 lbs	1600 lbs
FATD-101x18-35	5,285 lbs	1715 lbs
FATD-101x20-35	5,195 lbs	1805 lbs

-Available Sizes -52 Models-

Description	Payload	Dry Wt.
FATD-101x14-52	8,205 lbs	1685 lbs
FATD-101x16-52	8,130 lbs	1760 lbs
FATD-101x18-52	8,020 lbs	1870 lbs
FATD-101x20-52	7,925 lbs	1965 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Extra Lashing Rings 4k lb
Recessed Lashing Rings 6k lb
Jack Caster Wheel
Side Mount Pivot Jack
2-5/16" Adjustable Coupler
Front Rail Kit, Bolt In
A-Frame Mounted, Lockable Handle Tool Box

SASD-TD

Snowmobile Style, **A**luminum Frame, **S**ingle Axle, **D**eck over Axle, **T**ilt **D**eck



-Standard Features and Equipment-

Deck Size: 102" W x 120" L	Lighting: LED Lighting Package
Overall Size: 102" W x 164" L	Harness: Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone
GVWR: 2,990lb (may be increased to 3,500lb with Electric Brake option)	Jack: 5,000lb Cap, Side Mount, Pivot Jack, ZP
Deck to GND Height: 30"	Decking: 3/4" Douglas Fir/Larch Plywood
Coupler to GND Height: 22"	Safety Chains: 5/16" x 30", 7,600lb Rating per Chain, S-Hook w/ Safety Latch, ZP
Frame Tubes: 3.00" x 2.00" x .125" 6061-T6	Lashing Rings: 6 x 2,000lb WLL Lashing Rings, 3/8 Dia, ZP
Hitch Tubes: 3.00" x 2.00" x .188" 6061-T6	Ski-Tie Bar: 2 x Super-clamp Hold Down Bars, with 24" Adjustable Super-trac Kit
Cross members: 2.50" x 1.25" x .125" 6061-T6 on 24" centers	Loading: 30 Degree Loading Angle, Tilt Deck
Axle: Dexter 3500lb Leaf Sprung, Idler Axle	Spare Tire Mount: Underside Spare Tire Holder
Coupler: 2" Ball, A-frame Style, Zinc Plated, with Polypropylene Isolation Tape	Zinc-Plated Axle Mounting Brackets with Polypropylene Tape
Tires: Goodride or Westlake ST205/75R15 6-ply Radial Tires	Features: Laser Cut Side Rails/Anchor Points
Wheels: Black Modular Style Wheels, R15" x 6" W, 5 Lug on 4.5" BHP	Cushioned deck landing, rubber bumper and gas strut
Harness Plug: 4-Flat, Easy-Pull, Electrical Connector	

-Available Sizes -

Description	Payload	Dry Wt.
SASD-101x10-TD	2,340 lbs	650 lbs

-Available Options-

Description
Aluminum Wheel Upgrade Package
Spare Wheel, Aluminum
Spare Wheel, Steel
Super-glide Decking Upgrade
Downward Deflecting Spray Shield
Tool Box, Lockable Handle
Electric Braking Axle Upgrade

SASD/SATD GEN1

Snowmobile Style, **A**luminum Frame, **S**ingle OR **T**andem Axle, **D**eck over Trailer



-Standard Features and Equipment-

SASD-101x12-G1

SATD-101x22-G1

-6061 All Aluminum Frame	-6061 All Aluminum Frame
-3500lb Straight Axle, Idler	-3500lb Straight Axles, Elec. Brake
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape
-4-Pin Flat, Easy Pull Electrical Connector	-7-Pin RV Style Electrical Connector
-2" Ball Coupler, Max rating 700lb tongue WT, with Polypropylene Tape	-Junction Box, Break-away Kit with Battery and Charger
-ST205/75R15 6-ply Radial Tires	-2-5/16" Ball Coupler, Max rating 2,100lb tongue WT, with Polypropylene Tape
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-ST205/75R15 6-ply Radial Tires
-LED Lighting Package	-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-LED Lighting Package
-A-Frame Mounted Jack Rated at 5K lbs	-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone
-3/4" Douglas Fir/Larch Plywood Floor	-A-Frame Mounted Jack Rated at 5K lbs
-5/16" x 30" Safety Chains, 7.6K lb Rating, with Safety Latch	-3/4" Douglas Fir/Larch Plywood Floor
-Pull Out Rear Ramp Rated at 1000lbs, 90" L x 51" W	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-6 x 2,000lb Lashing Rings , ZP	-Pull Out Rear Ramp Rated at 1000lbs, 90" L x 51" W
-2 x Superclamp Hold Down Bars with 2' of adjustable Supertrac	-9 x 2,000lb Lashing Rings , ZP
-Full Length 3" High Side Rail	-4 x Superclamp Hold Down Bars with 2' of adjustable Supertrac
-Underside Spare Tire Mount	-Full Length 3" High Side Rail
-Deck to Ground Height: 30"	-Underside Spare Tire Mount
-Ground to Coupler Height: 21" When Level	-Deck to Ground Height: 30"
-GVWR: 2,990lbs (3,500lbs with additional electric brake option)	-Ground to Coupler Height: 21" When Level
	-GVWR: 7000lbs

-Available Sizes-

Description	STD. Payload	Dry Wt.
SASD-101x12-G1	2,190 lbs	800 lbs
SATD-101x22-G1	5,560 lbs	1440 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Extra Lashing Rings 2k lb
Superglide Decking Upgrade
GEN1 Spray Shield

SASD/SATD GEN2

Snowmobile Style, **A**luminum Frame, **S**ingle OR **T**andem Axle, **D**eck over Trailer



-Standard Features and Equipment-

SASD-101x12-G2

SATD-101x22-G2

-6061 All Aluminum Frame	-6061 All Aluminum Frame
-3500lb Straight Axle, Idler	-3500lb Straight Axles, Elec. Brake
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape
-4-Pin Flat, Easy Pull Electrical Connector	-7-Pin RV Style Electrical Connector
-2" Ball Coupler, Max rating 700lb tongue WT, with Polypropylene Tape	-Junction Box, Break-away Kit with Battery and Charger
-ST205/75R15 6-ply Radial Tires	-2-5/16" Ball Coupler, Max rating 2,100lb tongue WT, with Polypropylene Tape
-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black	-ST205/75R15 6-ply Radial Tires
-LED Lighting Package	-Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	-LED Lighting Package
-A-Frame Mounted Jack Rated at 5K lbs	-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone
-3/4" Douglas Fir/Larch Plywood Floor	-A-Frame Mounted Jack Rated at 5K lbs
-5/16" x 30" Safety Chains, 7.6K lb Rating, with Safety Latch	-3/4" Douglas Fir/Larch Plywood Floor
-Pull Out Rear Ramp Rated at 1000lbs, 93" L x 66" W	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-Rear Ramp Door (Avoids setting ramp on ground when setting up)	-Pull Out Rear Ramp Rated at 1000lbs, 93" L x 66" W
-6 x 2,000lb Lashing Rings , ZP	-Rear Ramp Door (Avoids setting ramp on ground when setting up)
-2 x Superclamp Hold Down Bars with 2' of adjustable Supertrac	-9 x 2,000lb Lashing Rings , ZP
-8 x Underdeck Aluminum Hook Points	-4 x Superclamp Hold Down Bars with 2' of adjustable Supertrac
-No Side Rail for Side Loading Capability	-12 x Underdeck Aluminum Hook Points
-Underside Spare Tire Mount	-No Side Rail for Side Loading Capability
-Deck to Ground Height: 30"	-Underside Spare Tire Mount
-Ground to Coupler Height: 20" When Level	-Deck to Ground Height: 30"
-GVWR: 2,990lbs (3,500lbs with additional electric brake option)	-Ground to Coupler Height: 20" When Level
	-GVWR: 7000lbs

-Available Sizes-

Description	STD. Payload	Dry Wt.
SASD-101x12-G2	2,090 lbs	915 lbs
SATD-101x22-G2	5,510 lbs	1490 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Extra Lashing Rings 2k lb
Superglide Decking Upgrade
GEN2 Spray Shield/Ramp

TRAILER OPTIONS



-Available Options-		
Wheel/Tire Upgrade Packages		Unit/Meas.
OPTION, T13583	Aluminum Wheel Package – 5-bolt Single Axle Kit	Kit
OPTION, T13584	Aluminum Wheel Package – 5-bolt Tandem Axle Kit	Kit
OPTION, T13586	Aluminum Wheel Package – 6-bolt Tandem Axle Kit	Kit
OPTION, T13587	Aluminum wheel Package – 8-bolt Tandem Axle Kit	Kit
Wheel/Tire Assemblies – Spare Wheels		Unit/Meas.
OPTION, T13599	ST205/75R15-C tire, Steel Modular Wheel, Black Paint, 5-4.5	Each
OPTION, T13600	ST205/75R15-C tire, Aluminum Spoked Wheel, Black Accents, 5-4.5	Each
OPTION, T13601	ST225/75R15-D tire, Steel Modular Wheel, Black Paint, 6-5.5	Each
OPTION, T13602	ST225/75R15-D tire, Aluminum Spoke Wheel, Black Accents, 6-5.5	Each
OPTION, T13603	ST235/80R16-E tire, Steel Modular Wheel, Black Paint, 8-6.5	Each
OPTION, T13604	ST235/80R16-E tire, Aluminum Spoke Wheel, Black Accents, 8-6.5	Each
Trailer Accessories		Unit/Meas.
OPTION, T13726	Aluminum Decking Upgrade per SQ FT	SQ FT
OPTION, T10128	Recessed 6000lb Lashing Rings	Each
OPTION, T12682	STD 4000lb Lashing Rings, Additional Rings	Each
OPTION, T13383	STD 2000lb Lashing Rings, Additional Rings	Each
OPTION, T12884	5K Pivoting Jack, Round Tube, Top Wind, Side Mount	Each
OPTION, T13439	5K Drop Leg Jack, Round Tube, Top Wind, A-Frame Mount	Each
OPTION, T11988	7K Drop Leg Jack, Square tube, Top Wind, Side Mount	Each
OPTION, T13725	9.5K Drop Leg Jack, Square tube, Side Wind, Side Mount	Each
OPTION, T10306	Jack Caster Wheel	Each
OPTION, T13165	Tool Box, Universal Fit, A-Frame Mounted, Locking Handle	Kit
OPTION, T13065	Spare Tire Holder, Stake Pocket Mount (UATF, FATD, EATF)	Kit
OPTION, T13274	Winch Mount, 12" x 18" UATF models	Kit
OPTION, T13275	Winch Mount, 12" x 18" UATR/UATS models	Kit
OPTION, T13597	Winch Mount, 12" x 18" FATD/EATF models	Kit
OPTION, T12959	Rear Stabilizer Stands, Drop Leg (UATF, UATR, UATS)	Kit
OPTION, T13219	Adjustable Height 2-5/16 Coupler Assembly	Kit
OPTION, T13211	UATF Front Rail Cover (ATP Stone Shield)	Kit
OPTION, T13353	FATD Front Rail Kit, Bolt In Kit	Kit
OPTION, T13389	FATD Sled Ramp Add on Kit	Kit
OPTION, T11709	Super glide Kit (1 Kit is for 2 sleds or 12' of deck)	Kit
OPTION, T11402	Super clamp II - Front, w/Screw-Style Deck Hook	Kit
OPTION, T13204	3500lb Electric Brake Upgrade Kit	Kit
OPTION, T13456	UATT Under Deck Winch Mount Kit	Kit
OPTION, T13576	UATF Ramp Extensions	Kit
OPTION, T13145	60" Solid Side Rear Drop In Panel Kit	Kit
OPTION, T13146	66" Solid Side Rear Drop In Panel Kit	Kit
OPTION, T13147	76" Solid Side Rear Drop In Panel Kit	Kit
OPTION, T13148	82" Solid Side Rear Drop In Panel Kit	Kit



Premium Aluminum Trailers, Built for Work or Play

Phone: (204) 364-2785
 Email: sales@stronghaul.com
 Address: 139144 Road 11E Arborg, MB, Canada
 Box 269 R0C 0A0

Trailer Spray Shields		Unit/Meas.
OPTION, T13041	60" Rail Side Spray Shield, 27" Tall	Kit
OPTION, T13040	66" Rail Side Spray Shield, 27" Tall	Kit
OPTION, T13039	76" Rail Side/Open Deck Spray Shield, 27" Tall	Kit
OPTION, T12864	82" Rail Side/Open Deck Spray Shield, 27" Tall	Kit
OPTION, T13045	60" Solid Side Spray Shield, 15" Tall	Kit
OPTION, T13044	66" Solid Side Spray Shield, 15" Tall	Kit
OPTION, T13043	76" Solid Side Spray Shield, 15" Tall	Kit
OPTION, T13042	82" Solid Side Spray Shield, 15" Tall	Kit
OPTION, T12156	GEN1 Snowmobile, Downward Deflecting, Spray Shield	Kit
OPTION, T13144	GEN2 Snowmobile, Upward Deflecting, Drive-off Spray Shield	Kit
Replacement Lighting		Unit/Meas.
66655	2-1/2" Oval Amber LED Clearance Light - Clear Lens, Surface Mount	Each
66656	2-1/2" Oval Red LED Clearance Light - Clear Lens, Surface Mount	Each
68457	LED License Plate Light, Surface Mount	Each
T12349	LED Fender Light LH - Clear Lens	Each
T12350	LED Fender Light RH - Clear Lens	Each
T12366	15" Slimline Red LED, Triple Marker Center Light - Clear	Each
T12367	15" Slimline Red LED, Signal, Turn, Tail Light - Clear	Each
Replacement ramps		Unit/Meas.
T11453	Drop in Side Ramp (DR Models) 61"L x 13"W, 1250lbs CAP/Per Ramp	Each
T12970	Pocket Ramp (FATD Models) 93"L x 14"W, 2000lbs CAP/Per Ramp	Each
T12671	Pocket Ramp (UATF/UASF Models) 78"L x 14"W, 2500lbs CAP/Per Ramp	Each
T13691	Pocket Ramp (EATF Models) 78"L x 14"W, 7000lbs CAP/Per Ramp	Each
T10163	Bi-Fold Ramp (Utility 60" Models) 55"L x 55"W, 3000lbs CAP/Per Ramp	Each
T10164	Bi-Fold Ramp (Utility 66" Models) 55"L x 61"W, 3000lbs CAP/Per Ramp	Each
T12968	Bi-Fold Ramp (Utility 76" Models) 55"L x 71"W, 3000lbs CAP/Per Ramp	Each
T12377	Bi-Fold Ramp (Utility 82" Models) 55"L x 77"W, 3000lbs CAP/Per Ramp	Each
T12967	Snowmobile Ramp (SASD/SATD GEN1 Models) 90"L x 51"W, 1000lbs CAP/Per Ramp	Each
T13390	Snowmobile Ramp (SASD/SATD GEN2 Models) 92"L x 66"W, 1000lbs CAP/Per Ramp	Each